



SAFETY WIRE

Kupo safety wire is fabricated of galvanized steel wire, and constructed in accordance with DIN3055 and DIN3060. It is used as secondary bonding for rigging, lighting and other equipments to truss or stand, rendering a secondary flexible coupling in additional to regular fixture. Standard finish is metallic silver and black coating is available upon request.

SW-01

SW-02

SW-03

SW-04



CUSTOM DESIGN WELCOME!

SW-01YP/SAFETY WIRE WITH YOKE PLATE

Kupo extends the application of safety wire by adding a yoke plate on SW-01 safety wire. By fastening the plate to the yoke of lighting fixture, it offers an easier management for safety wire as the fixing point is just that clear. With this design, the safety bond won't get lost any more as it is firmly attached to the yoke. A simple and clever accessory to the fixtures.



SW-01YP



SW-ACC/SAETY WIRE FOR ETC ACCESSORIES

Unique design to add safety to the accessories in front of lighting fixture. Black finish makes it low-keyed against luminary. Dia. 2mm wire and overall 60cm length provides the maximum utility.



SW-ACC




with half top hat




with color frame on S4 Jr.




SAFETY WIRE

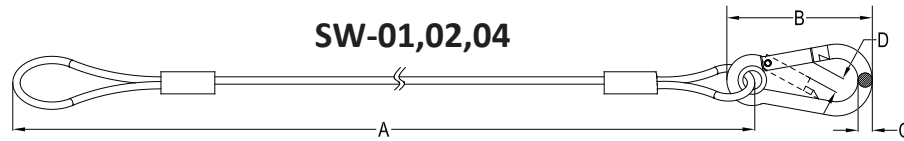

Item	Description	SWL	A	B	C	D
SW-01	Ø 3.2mm, 7 x 19 wire	10 KG	75cm	60mm	5.8mm	7.8mm
SW-02	Ø 2.0mm, 7 x 7 wire; Ø 3.0 mm (with PVC jacket)	5 KG	70cm	50mm	4.8mm	7.0mm
SW-04	Ø 3.2mm, 7 x 7 wire; Ø 4.5mm (with PVC jacket)	10 KG	75cm	60mm	5.8mm	7.8mm

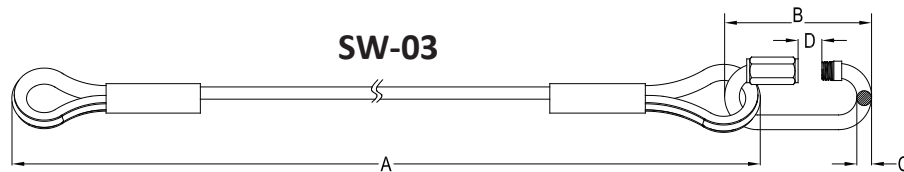

Item	Description	SWL	A	B	C	D
SW-03	Ø 5.0mm, 7 x 19 wire	50 KG	100cm	60mm	5.8mm	9.7mm

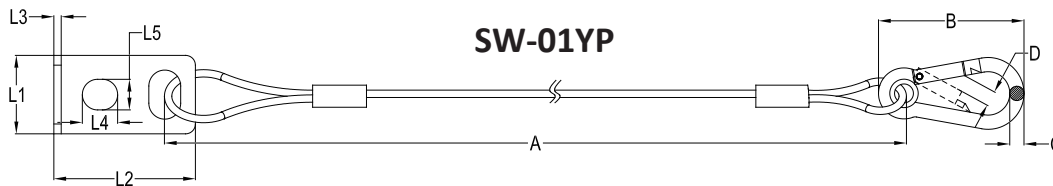

Item	Description	SWL	L1	L2	L3	L4/5
SW-01YP	Ø 3.2mm, 7 x 19 wire; SW-01 with yoke fixing plate	10 KG	32mm	58mm	3mm	14.5mm 12.5mm



Item	Description	SWL	A	B	C	D/L1
SW-ACC	Ø 2.0mm, 7 x 7 wire; with M4 fixing hole on D-ring	5 KG	60cm	50mm	4.8mm	70mm M4