

## Features

- 48 channels of control
- 30 fixtures
- 480 Submasters (20 pages of 24)
- 999 Memories
- Playback stack with programmable times
- Patching to 512 DMX channels
- Snapshot of all 512 DMX-IN channels
- Monitor Display
- USB storage and keyboard support
- MIDI Notes
- Online Help
- Lock function



## Overview

The Jester ML48 is a new lighting console from Zero 88. It offers direct fader control of up to 48 channels of DMX and 30 fixtures using fixture select buttons and three control wheels. Replay is either via submasters or a traditional theatre playback stack.

A monitor port is standard on the Jester ML48. Channel, fixture, cuestack and submaster data can all be viewed using the monitor. Onboard LCD screens also provide the user with all information needed to operate the console allowing it to be used without a monitor. (It is recommended that for ease of use the monitor is always used.)

A USB port allows users to back-up shows that have been recorded on the Jester ML48. A USB Keyboard can also be connected for fast entry of names and numbers.

A DMX-in port allows the Jester ML48 to be used as an economical back-up console for other desks. It is possible to snapshot a full 512 channels of DMX into submasters or the memory stack.

The Jester ML48 has three modes, allowing it to operate as simple two scene preset desk through to a fully functional memory console. A wide mode feature allows 48 channel operation, with an internal scene store for 2-preset operation. In Run mode the user has full access to all the fader channels on the console. This allows live changes to be made to specials instantly.

MIDI notes can be used to trigger channels or submasters. A sound to light jack allows for chases to be sequenced to music. A remote input jack allows any button on the front panel to be pressed from a remote control. Chases can be recorded into the memory stack or directly into submasters.

The Jester ML48 provides users with a powerful set of programming and playback tools for generic dimmers and intelligent fixtures in an easy to use and economical lighting console.

# Jester ML48

## Ordering Information

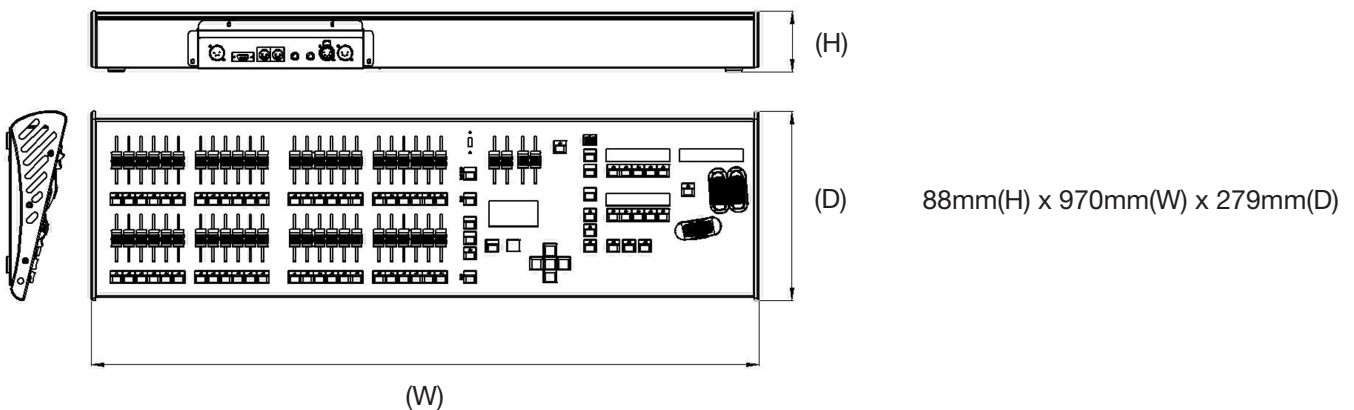
Jester ML 48: 00-123-00








## Supplied Accessories

Power Supply  
Operating Manual (on CD)

## Specifications

- Control Channels: Up to 512
- Channel Faders: 48
- Fixture select buttons: 3 pages of 10
- Preset Master Faders: 2
- Sequence Master Fader: 1
- Grand Master Fader: 1
- Blackout Button: 1
- Flash Buttons: 48
- Power Supply: External 100-240 Volts 50/60Hz
- DMX Output: 1 Universe
- DMX Input: 1 Universe
- DMX to USITT DMX512-A
- Dimensions: 88mm(H) x 970mm(W) x 279mm(D)
- Weight: 8.5Kg
- Operating Temperature: +5°C to +40°C
- Humidity: 5% to 95% Non condensing



	Voltage	100V	<input checked="" type="checkbox"/>	220 - 240V NON CE	<input checked="" type="checkbox"/>	Standards 	    
		110 - 127V	<input checked="" type="checkbox"/>	277V	<input type="checkbox"/>		
		230V CE	<input checked="" type="checkbox"/>	347V	<input type="checkbox"/>		

This product conforms to one or more of the above standards.  
Please contact your local Cooper Controls representative for further information.

## Zero 88

Cooper Controls Ltd, Usk House, Lakeside Close,  
Llantarnam Park, Cwmbran, NP44 3HD, UK.  
Tel : +44 (0) 1633 838088 Fax : +44 (0) 1633 867880  
E-mail : enquiries@zero88.com web : www.zero88.com